

Torsion Axle Order Form

Your Company & Phone Number: _____

Your name: _____

Ship Via: _____


Sign here for approval of order: _____

Stud Size (Please check one)

1/2 7K Only: 9/16 5/8



Choose a Hub (IF REQUIRED)

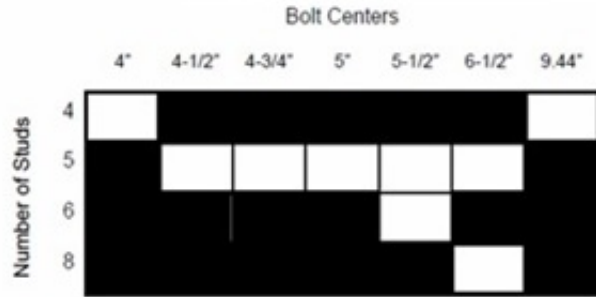

Required Information

Axle Mount Bolt On Weld On

A – Main Rail: Outside to Outside: _____

B – Hub Face to Hub Face: _____

C – Mounting Bolt Center: _____

D – Torsion Arm to Hub Face: _____

E – Torsion Arm Length:
(Axle center to spindle center): _____

(STANDARD SIZE IS 4.5" - All others are special order)


Axle Quantity: _____

Axle Capacity: _____


Axle Type: Brakes Idler Bare (choose one)
 Electric Hydraulic (choose one)

Mount Format: Side Mount Top Mount (choose one)
(See diagram below)

Quantity Required: _____

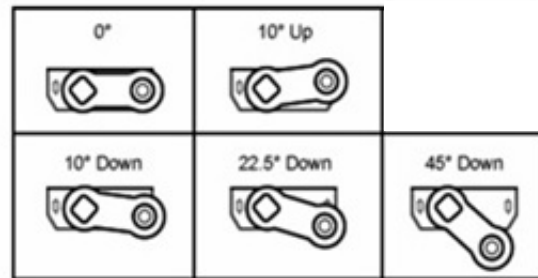


Axle Degrees _____ : Up Down (choose one)



Mounting Bracket Directions: (choose one)

Inboard (Standard)
 Outboard (Reverse)

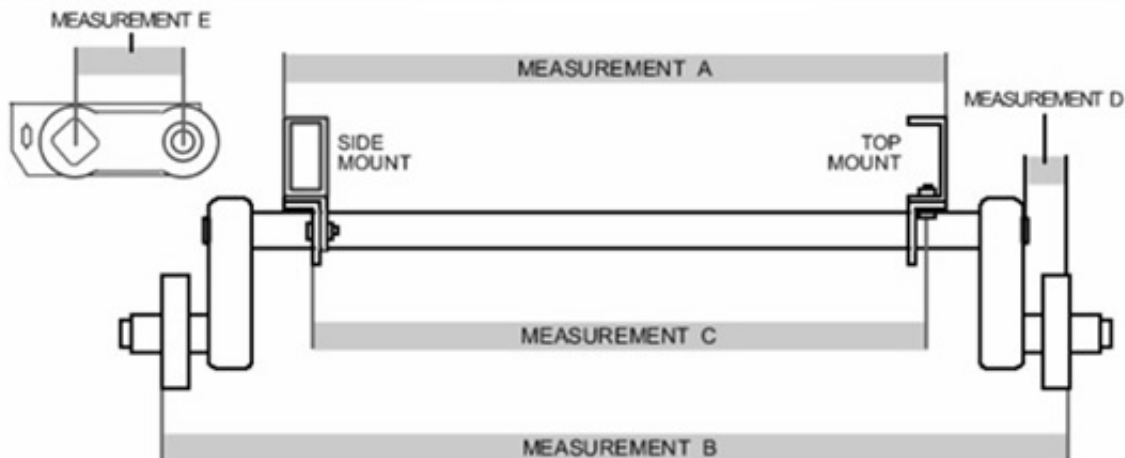

Special Notes:

- The Max. and Min. length between the hub face and outside mounting brackets is: Max. = 19.9", Min. = 9.5"
- Minimums are based on mfg. tolerances only. Some tire and wheel combinations may create interference
- Due to manufacturing differences, some adjustment may be required in mounting

Fill out this form and fax it to us at (780) 461-3460